

### **UBC Steam to Hot Water Conversion**

IDEA Main Conference 20-24th June 2016

Paul Holt Director, Engineering and Utilities






# The University of British Columbia



a place of mind

- 15 million sq.ft. of institutional & student Housing over 1,000 acres
- 1 million sq.ft. added since 2007
- Day time pop. ~65,000 i.e. 50,000 Students and 15,000 Faculty & Staff

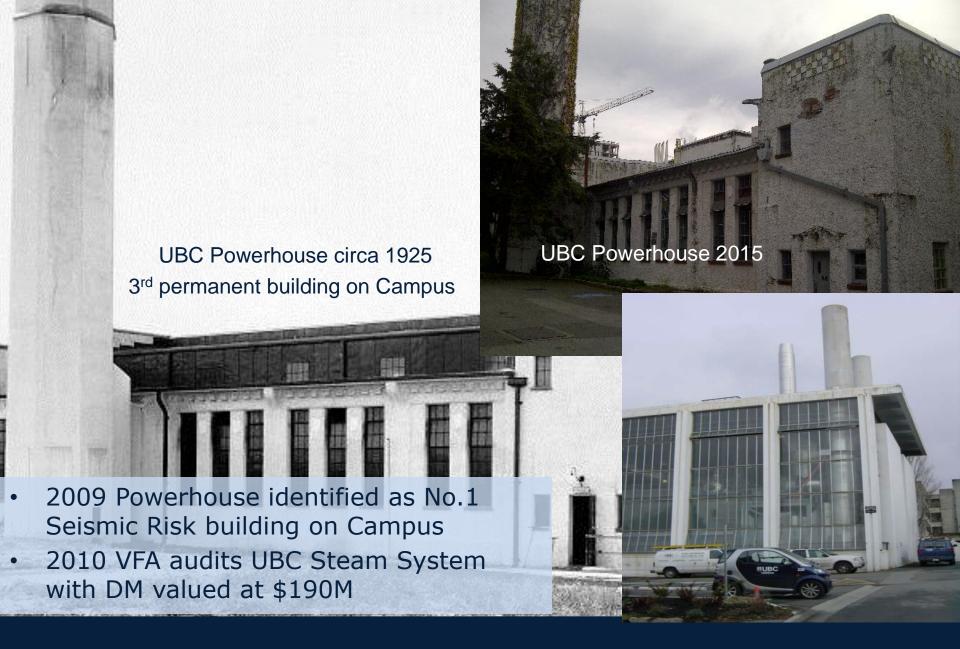


# **Background: Deferred Maintenance**




- 2007 UBC Achieves
   Kyoto protocol
   reduction targets
- 2007 re- baselines its campus GHG inventory

2007 Baseline 61,090tons CO2e



Background: UBC GHG Commitment Confirmed

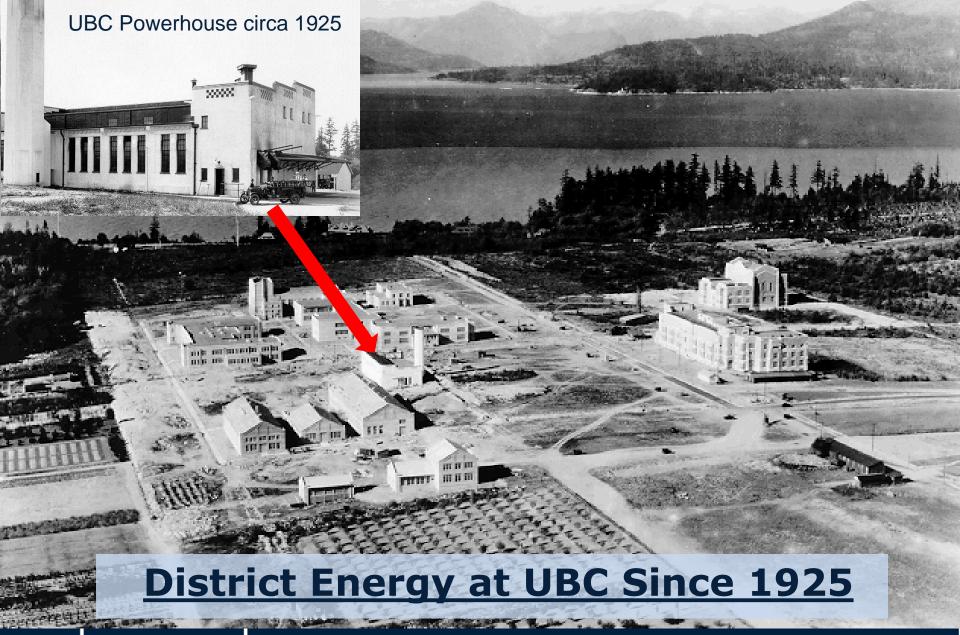




#### **UBC Steam Powerhouse**

- 1925: 3 original Boilers (Coal fired)
- 1950's Boilers 1, 2 & 3 replaced (FO)
- 1961 New wing added and Boiler 4 (NG) installed
- 1965 Boilers 1, 2 & 3 converted to NG
- 1969 Boiler 5 installed
- 1972 Boiler 3 decommissioned (Fire)
- 2015 (July) Boilers 1 &
   2 decommissioned



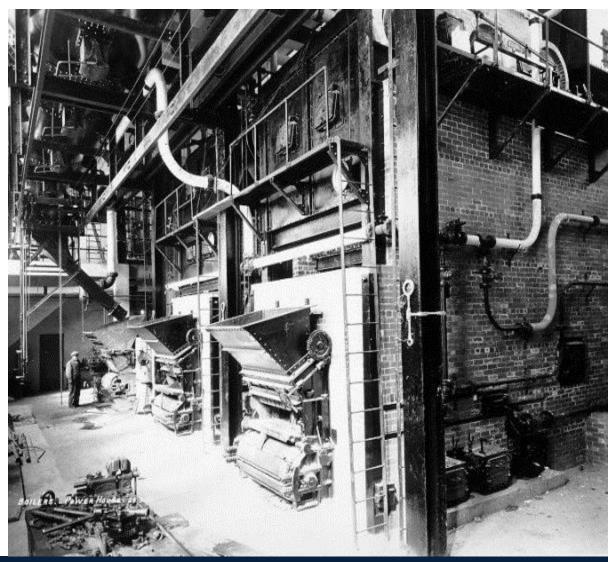



# District Steam: Continuous Investment & Improvements


#### **2010 Summary**

In continuous service for ~85 years:


- 28km of Steam and condensate pipes (14 trench km's)
- 133\* buildings on Steam
- 400,000lbs/hr capacity
- 250,000lb/hr peak
- 785,000,000lbs/year
- ~1,000,000GJ/year
   NG
- 78% of Campus GHG
- Overall system efficiency 60%

\*Includes UBC Hospital (local health authority, not UBC)

## Steam as of January 2010

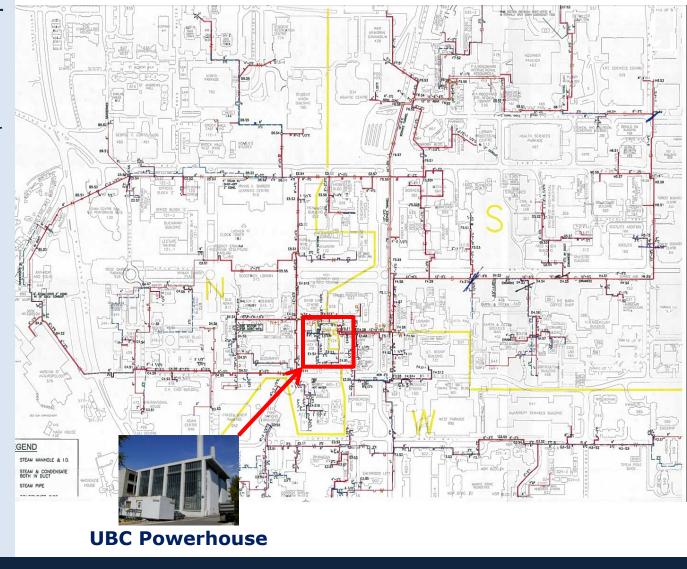

**Steam Academic District Energy System** 

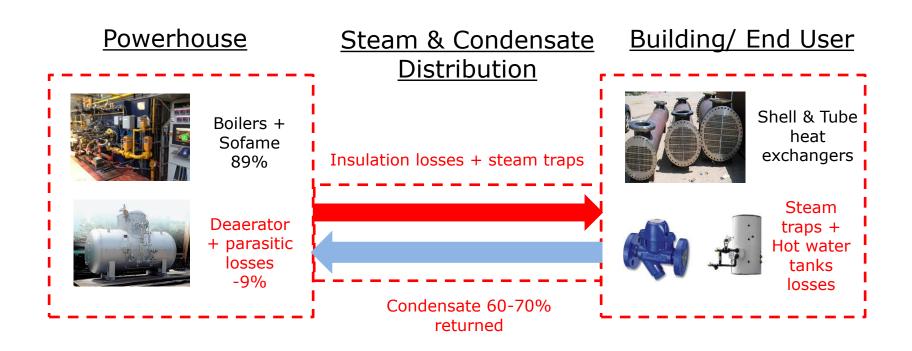

Plant = 80%

Distribution = 80%

End User = 90%

Overall Steam DES Efficiency = 80% x 80% x 90% = 60%





a place of mind

THE UNIVERSITY OF BRITISH COLUMBIA

# **Overview STHW Project**


PHASE 8,9
PHASE 4
PHASE 6,7
2015
Center
2015

PHASE 5 PHASE 1 2014 PHASE 2,3 2012 2013


#### 5 year, 9 phase, \$88 million project


- 22 kilometers of pre-insulated supply & return direct buried piping (11 trench km's)
- 115 building conversions
- New 45 MW Natural Gas fired Campus Energy Centre (Current capacity)
- 14 legacy buildings not converted to hot water
- 12 research buildings with ongoing steam process loads requirements



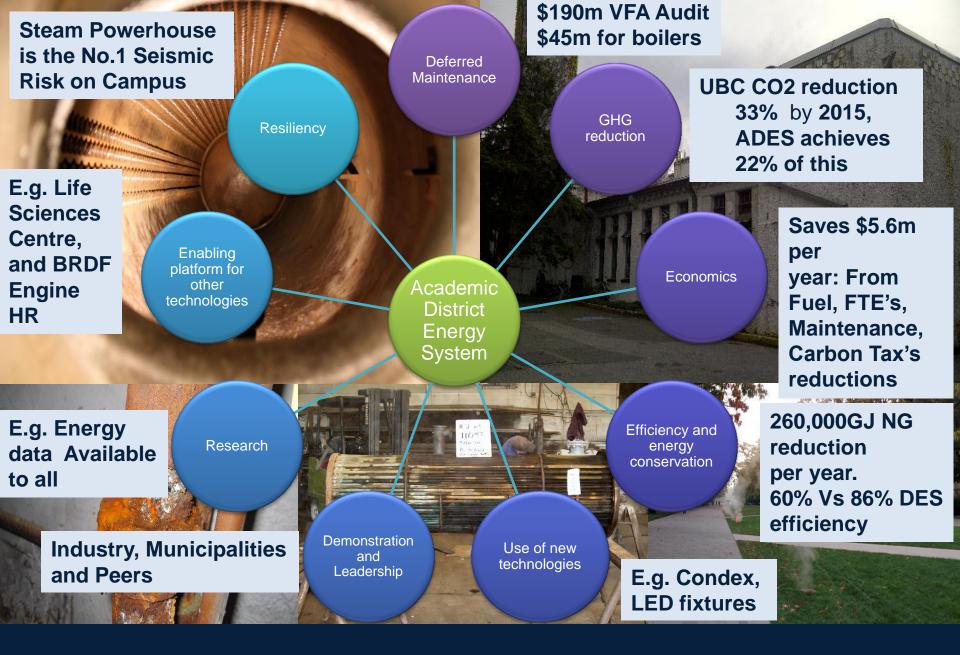

# The Motivation for Change

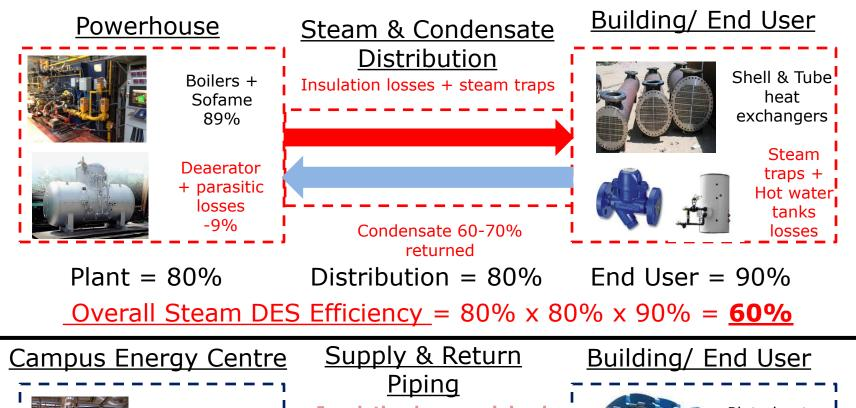

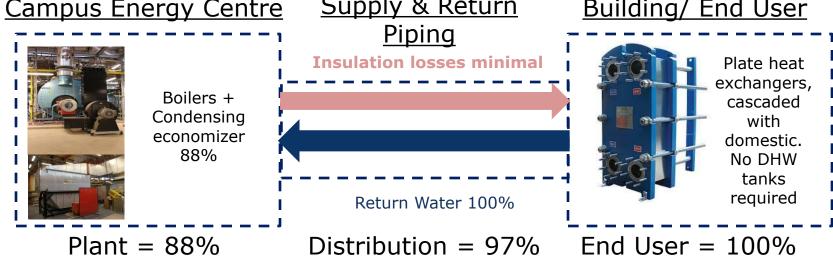

## Steam Vs HW System Efficiency Comparison

Overall Hot Water DES Efficiency = 89% x 97% x 100% = 86%

# **Project Risk Mitigation Strategy**


- 2011 Board of Governors (BOG) approves the \$88m project in principle and deploys the following strategy:
  - A step by step approach with main funding approval contingent upon the pilot or phase 1 performance evaluation and verification.
  - Stop NO Go or Off ramp options available up to phase 4
     i.e. the construction funding approval for the CEC:
- Timeline
  - 2011 Funding approval for phase 1 to provide proof of concept
  - 2012 Approve funding phase 2 & 3
  - 2013 Phase 4 CEC funding approved
  - 2013 Phase 5-10 full funding approved



#### **Phase 1 Summary**

- 1,100 trench meters of District Piping System (DPS) laid
- 13 buildings converted
- Successfully repurposed the existing oversized heat exchangers at USB (5MW).
- Connection for BRDF HR (1MW)
- Subsequently becomes the USB Energy Center (USBEC) (6MW total) (USB + BRDF HR)
- Phases 1 completed on budget and on time
- Concurrently 1km of trench steam lines decommissioned (insulation worse than expected)
- Confirmed Phase 1 energy savings of 12,000 GJ's NG and 600 tonnes of CO2 emissions


#### **Phase 1 Pilot Project**

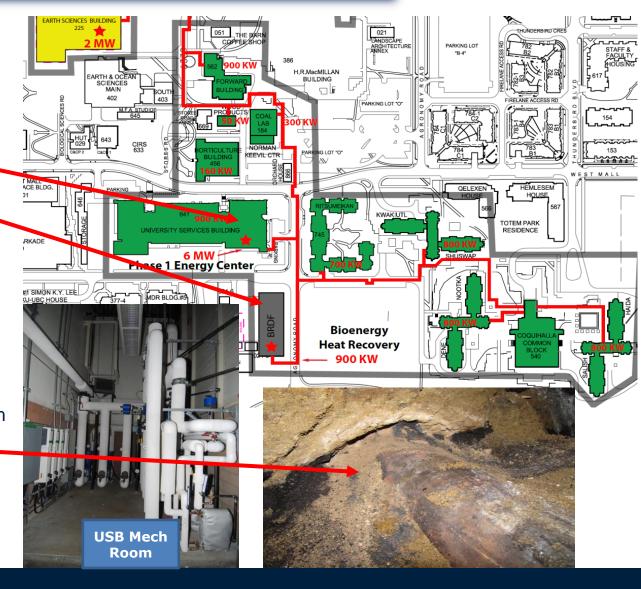




# Bridging the Energy gap to the CEC

- Phase 1, 2 & 3 converted 17 buildings and laid 4 trench km's of DPS.
- USBEC at maximum peak capacity after phase 3
- Phase 4: the CEC was a two year build
- A Temporary Energy Centre (TEC) was developed:
  - 2 x 7.5MW Steam to Hot Water Heat Exchangers (15MWt total)
  - The TEC + USBEC gave a total 23MWt capacity for the system whilst the CEC was being built which enabled further building change overs to occur

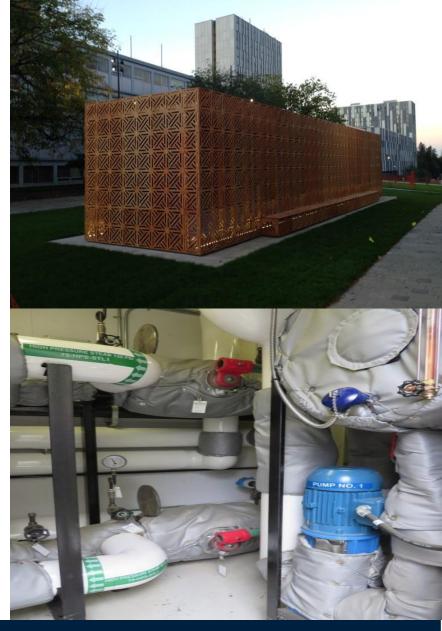



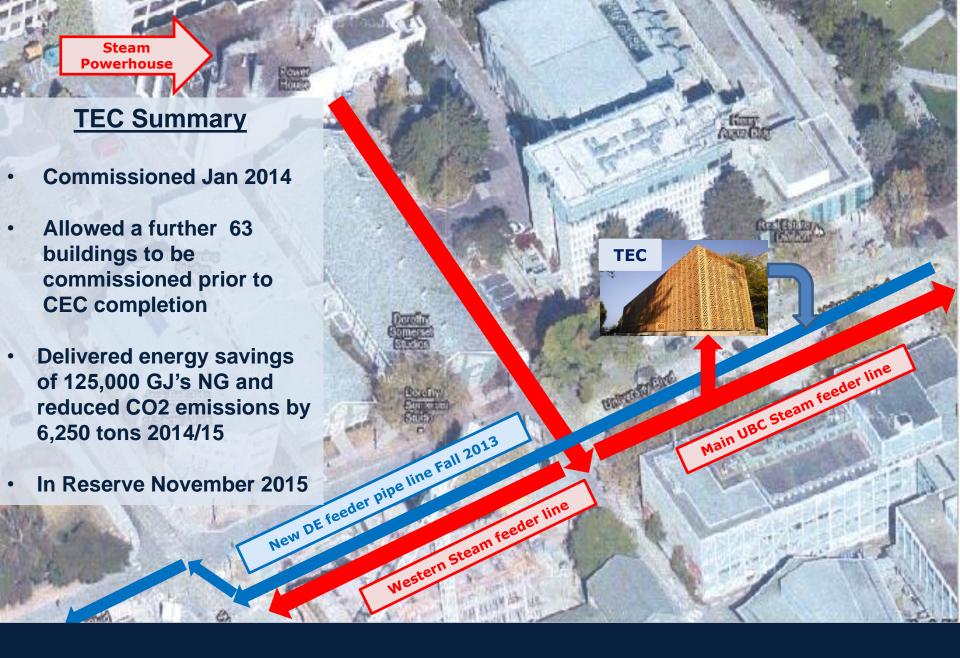


Siting the Temporary Energy Centre (TEC)









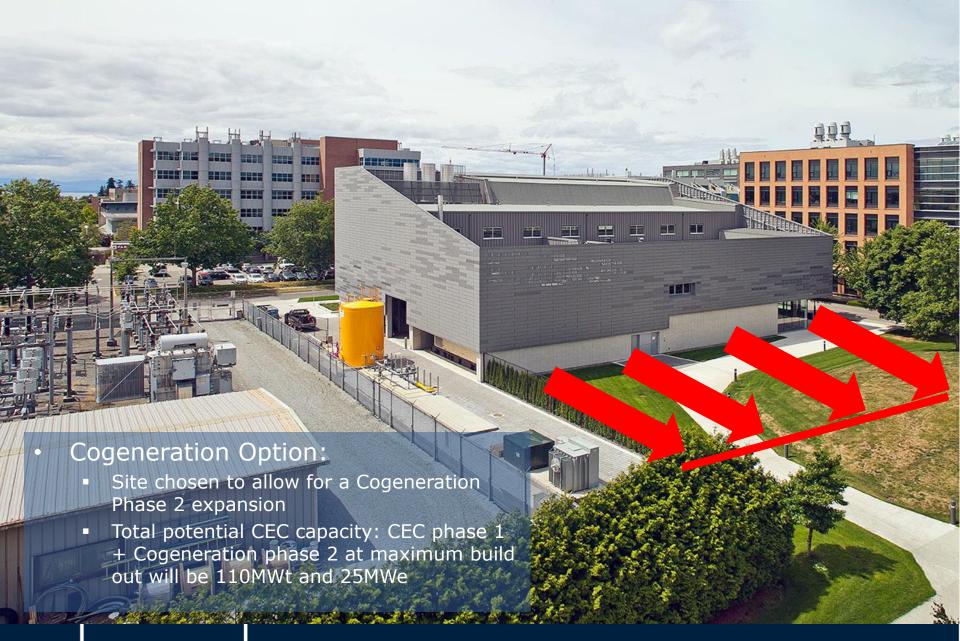








# **Energy Transfer Stations (ETS)**

Typical Phase 1 cascaded ETS schematic design

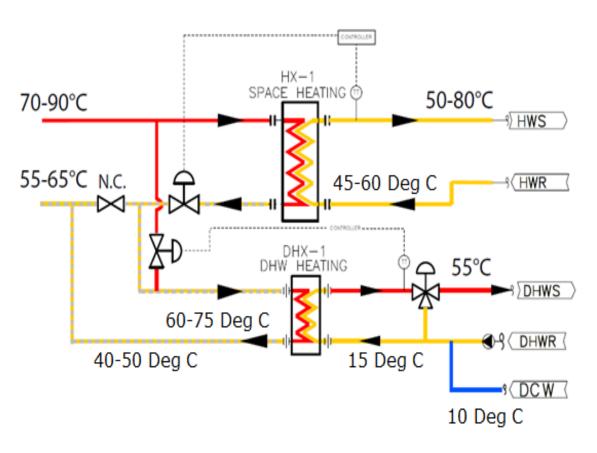




www.technicalguidelines.ubc.ca/Division\_23/UBC\_DPS-ETS\_Design\_Basis\_6March2014.pdf



# Permanent Orphan Steam Buildings

The original 1930's buildings were directly heated by steam on their secondary sides. There were 8 buildings remaining in this category and they were deemed to be too cost prohibitive to convert to hot water:







#### Original Project Scope:

8 x 1930's buildings converted to electric baseboard

However, during the 5 year project, 7 buildings that were due for demolition were reprioritized by the university and kept:

#### **Additional Scope:**

- 1 x 1930's building: HW boiler installed and existing steam radiators were repurposed to use Hot Water
- 3 x 1960's buildings were on an existing small hydronic distribution grid with an original primary STHW Hex supplying this mini HW district. We replaced the STHW Hex with a new HW boiler.
- 2 x 1960's buildings using a forced air system. Here we replaced the original AHU steam coils with NG coils







#### **Process Steam Loads**

- 12 buildings with sterilization requirements (Autoclaves, cage washers)
- 6 buildings require steam for humidification Most researchers already had clean steam generators
- 3 x Steam absorption chillers replaced
- Kitchens Dishwashers and steam kettles














# Things we would do differently

- Earlier assessment and full scoping of orphan buildings and process steam requirements
- Work year round from the get go (first three years were summer only)
- Dedicated owner team (HW Process Engineer hired year 3)
- Improved communications for campus stakeholders on disruptions
- Regular communication for project team crucial
- The temporary energy centre was essential (we should have done it earlier)




#### **2016 Summary**

- 22 kilometers of piping (11 trench km's)
- CEC commissioned 45MW peaking Capacity
- BRDF ~8MW's provides thermal baseload and all summer thermal production needs
- 115 building converted
- 14 buildings + 4
   UBC Hospital
   Buildings not
   converted to hot
   water
- 12 research buildings with steam process loads requirements

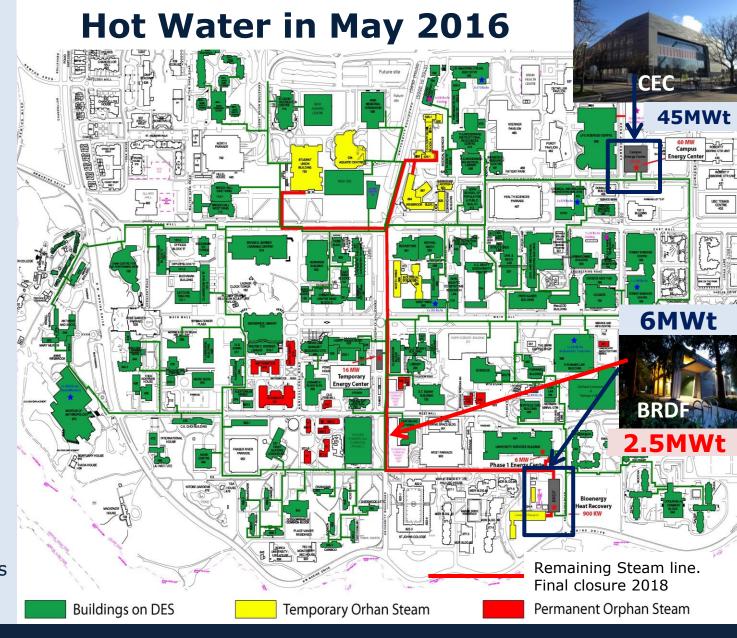

#### **Academic District Energy System**

# **UBC CO2 Emissions Post Projects**

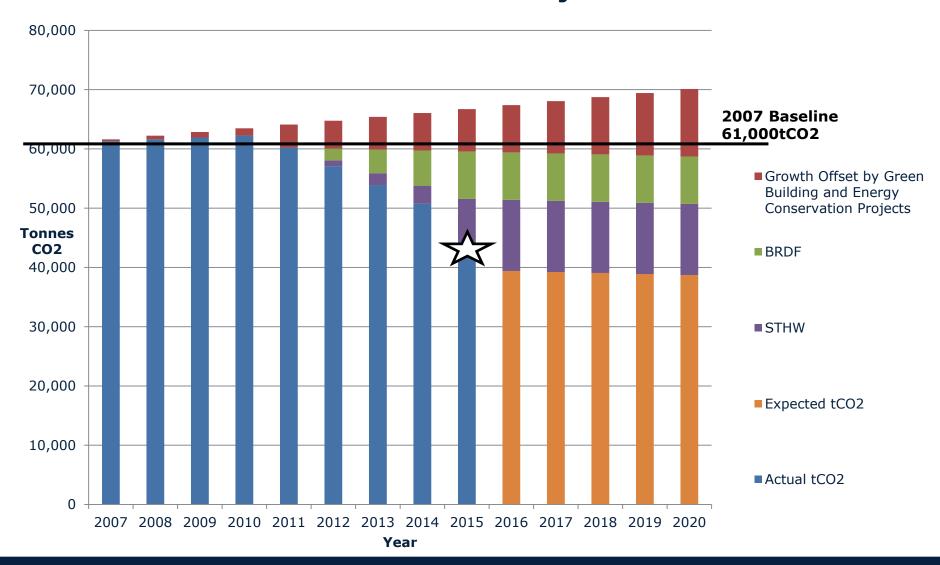

2015: UBC Achieves 18,300ton CO2e or 30% GHG Reduction from 2007 baseline, despite a 7% growth in campus buildings

## **Conclusions to Date**

- Phased implementation:
  - Allowed for lessons learned in earlier phases to be incorporated into later phases
  - Verified capital costs and delivered energy and cost savings from phase 1 onwards
- Developing a TEC and the use of existing steam to hot water HEX's, allowed for energization of the DPS and for 80 building conversions to be completed prior to Campus Energy Centre coming into service.
- Energy reduction targets achieved and now expected to exceed forecasts in 2016
- UBC Achieves a 30% GHG reduction 2015, new expectation could be closer to 40% 2016
- CEC has expandability to meet all future thermal load growth for the ADES and NDES
- 14 separate UBC departments, 18 different consultants and contractors firms: Altogether over 3,000 people worked on the ADES project





Paul Holt paul.holt@ubc.ca